


FIXING
ACCESSORIES of
POLYCARBONATE
MULTIWALL SHEETS



Polycarbonate and Aluminium Profiles


Fixing accessories are very important elements for the installation of Polycarbonate Multiwall Sheets. During the installation of the projects, in order to have better result, to save time and to reduce the installation cost, it is very important to use appropriate accessories. Işık Plastik AŞ offers these accessories in Polycarbonate Type and Aluminum Type. All our PC profiles have additives to protect against UV weathering. Our profiles are also suitable for both PC Multiwall and PC Solid installations. Işık Plastik AŞ offers a range of fixings and accessories to complement its range of “Policam ST Multiwall Polycarbonate Sheets”. For best results; always use Policam recommended accessories. For further information and guidance about accessories, please visit our web site: www.isikplastik.com.tr



POLYCARBONATE U PROFILES

Product Code	Sheet Thickness	Lenght	Colour*	Pcs For Pack
PLUP113	4 mm	2,1 mm	Clear	50
PLUP114	6 mm	2,1 mm	Clear	50
PLUP115	8 mm	2,1 mm	Clear	50
PLUP115	10 mm	2,1 mm	Clear	50
PLUP116	16 mm	2,1 mm	Clear	50


* Optionally produced by a bronze colour.

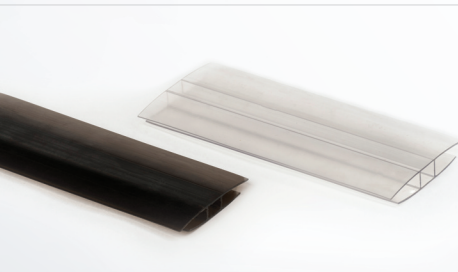

POLYCARBONATE H PROFILES


Product Code	Sheet Thickness	Lenght	Colour*	Pcs For Pack
PLHP117	4 mm	6 mm	Clear	20
PLHP118	6 mm	6 mm	Clear	20
PLHP119	8 mm	6 mm	Clear	20
PLHP120	10 mm	6 mm	Clear	20
PLHP121	16 mm	6 mm	Clear	10

* Optionally produced by a bronze colour.

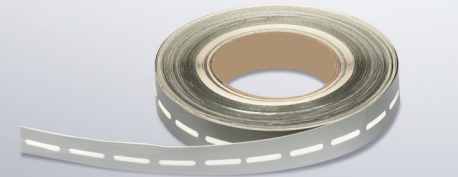

VENTILATING TAPE

Product Code	Witdh	Lenght	Colour	Pcs For Pack
PLHB122	25 mm	33 m	-	1
PLHB123	38 mm	33 m	-	1
PLHB124	45 mm	33 m	-	1

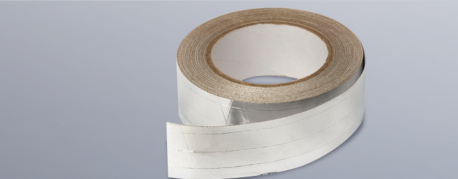

ALUMINIUM SEALING TAPE

Product Code	Witdh	Lenght	Colour	Pcs For Pack
PLSB125	25 mm	50 m	-	1
PLSB126	38 mm	50 m	-	1









CLADDING BUTTON

Product Code	Description	Thickness of Sheet	Colour	Pcs For Pack
PLCB127	Cladding Button	10 mm	Clear	10
PLCB128	Cladding Button	16 mm	Clear	10

How to Apply?

- 1 Polycarbonate Sheet
- 2 Cap 48 mm
- 3 Cover Cap
- 4 Edge Cap
- 5 End Cap with drainage
- 6 Base Profile
- 7 Antidust Ventilating Tape
- 8 EPDM Seal

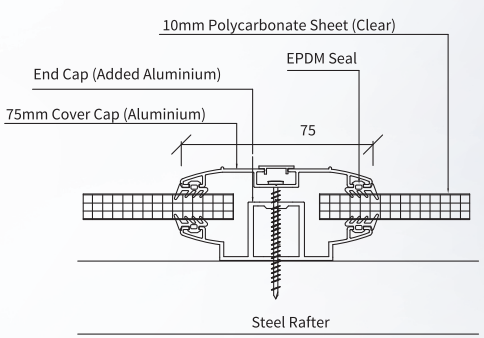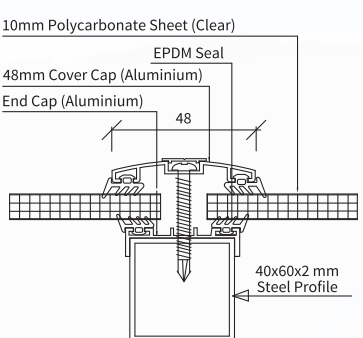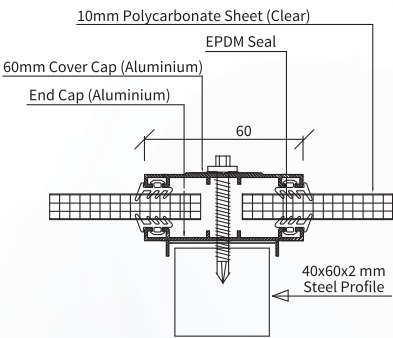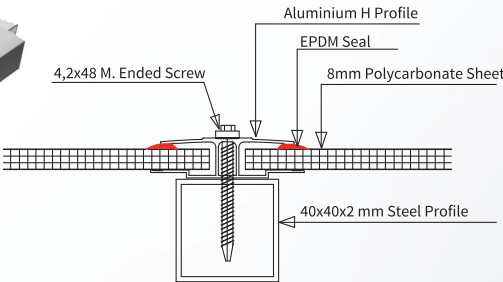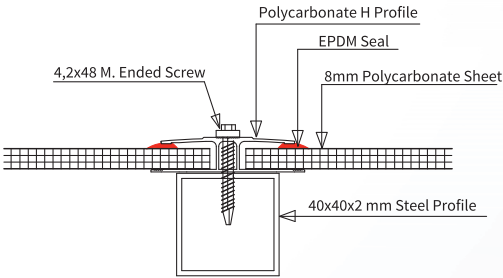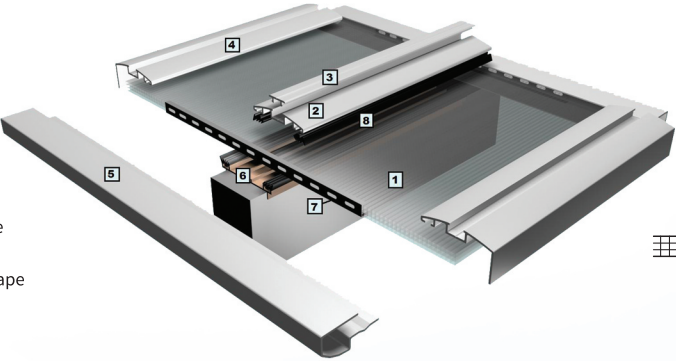

PLFT100		EPDM Glazing Seal
PLFT101		EPDM Plugged-in Seal
PLBT102		Antidust Ventilating Tape
PLVD103		Screw 19mm
PLVD104		Screw 42mm
PLPC105		Cover Cap
PLBP106		Cap (48mm)

PLBP107		Base Profile (48mm)
PLUP109		End Cape with Drainage (10mm)
PLUP109		End Cape U Trim with Drainage (16mm)
PLHP110		H Profile with Drainage
PLUK111		Cap (60mm)
PLAK112		Base Profile (60mm)



PLPG129 PMMA (Acrylic) GLUE

Description	: Volatile Liquid
Colour	: Lighten
Odor Acuity	: Acuity
Odor Threshold	: ~ 200 ppm
Boiling Point	: °C 40
Melting Point	: °C -97
Steam Pressure	: °C 30 529 mmHg, °C 20 355 mmHg.
Soluble (Water)	: Slightly Soluble (°C 25 % 1.3)
Soluble	: Miscible with most organic solvents
Specific Gravity	: 1.32 (Water = 1 for °C 4)
Steam Density	: 2.93 (Air= 1)
Flash Point	: None (BS EN 22719: 1994)
Flammable	: Nonflammable (BS 3900, scala test)